

Measurements of Performance in Laboratory IEEE 802.11 b, g Point-to-Point Links

^{1,2} J. Pacheco de Carvalho, ^{1,2} P. Gomes, ^{1,2} H. Veiga, ² C. Pacheco, ¹ N. Marques,
^{2,3} A. Reis

¹Centro de Informática, ²U. de Detecção Remota-Departamento de Física,
Universidade da Beira Interior, Rua Marquês d'Ávila e Bolama,
6201-001 Covilhã, Portugal

³Departamento de Electrónica e Telecomunicações / Instituto de Telecomunicações,
Universidade de Aveiro, 3810 Aveiro, Portugal
Email: pacheco@ubi.pt

Abstract. *The importance of wireless communications has been growing. Performance is a very relevant issue, leading to more reliable and efficient communications. Laboratory measurements are made about several performance aspects of Wi-Fi (IEEE 802.11 b, g) point-to-point links. A contribution is given to performance evaluation of this technology, using available access points from Linksys. Detailed results are presented and discussed, namely at OSI levels 4 and 7, from TCP, UDP and FTP experiments: TCP throughput, jitter, percentage datagram loss and FTP transfer rate.*

Keywords: *WLAN, Wi-Fi, Point-to-Point Links, Wireless Network Laboratory Performance Measurements*

1. Introduction

Wireless communications are increasingly important for their versatility, mobility and favourable prices. It is the case of microwave based technologies, e.g. Wi-Fi.

The importance and utilization of Wi-Fi have been growing for complementing traditional wired networks. Wi-Fi has been used both in ad hoc mode and infrastructure mode. In this case an access point, AP, is used to permit communications of Wi-Fi devices with a wired based LAN through a switch/router. In this way a WLAN, based on the AP, is formed. Wi-Fi has reached the personal home, forming a WPAN, allowing personal devices to communicate. Point-to-point and point-to-multipoint configurations are used both indoors and outdoors, requiring specific directional and omnidirectional antennas. Wi-Fi uses microwaves in the 2.4 and 5 GHz frequency bands and IEEE 802.11a, 802.11b and 802.11g standards [1]. Nominal transfer rates up to 11 (802.11b) and 54 Mbps (802.11 a, g) are permitted. CSMA/CA is the medium access control. Wireless communications, wave propagation [2,3] and WLAN practical implementations [4] have been studied. Detailed information is available about the 802.11 architecture, including performance analysis of the effective transfer rate. An optimum factor of 0.42 was presented for 11 Mbps point-to-point links [5]. Wi-Fi (802.11b) performance measurements are available for crowded indoor environments [6].

Performance has been a very important issue, resulting in more reliable and efficient communications. Telematic applications have specific performance requirements, depending on application. New telematic applications present special sensitivities to performances, when compared to traditional applications. Application characterization and requirements have been discussed for cases such as voice, Hi Fi audio, video on demand, moving images, HDTV images, virtual reality, interactive data, static images, intensive data, supercomputation, electronic mail, and file transfer [7]. Several measurements have been made for 2.4 GHz Wi-

Fi [8], as well as WiMAX and high speed FSO [9,10]. In the present work further Wi-Fi (IEEE 802.11 b,g) results arise, through OSI levels 4 and 7. Performance is evaluated in laboratory measurements of point-to-point links using available equipments.

The rest of the paper is structured as follows: Chapter 2 presents the experimental details i.e. the measurement setup and procedure. Results and discussion are presented in Chapter 3. Conclusions are drawn in Chapter 4.

2. Subject and Method

The measurements used Linksys WRT54GL wireless routers [11], with a Broadcom BCM5352 chip rev0, firmware DD-WRT v24-sp1-10011 [12], and 100-Base-TX/10-Base-T Allied Telesis AT-8000S/16 level 2 switches [13]. The wireless mode settings included bridged access point, point-to-point, and default minimum transmitted power. Interference free communication channels were used in the communications. WEP encryption was not activated. No power levels above the minimum were required as the access points were very close (30 cm).

The laboratory setup is shown in Fig. 1. TCP and UDP experiments at OSI level 4, were as mentioned in [10], permitting network performance results to be recorded. For a TCP connection, TCP throughput was obtained. For a UDP connection with a given bandwidth parameter, UDP throughput, jitter and percentage loss of datagrams were obtained. TCP packets and UDP datagrams of 1470 bytes size were used. A window size of 8 kbytes and a buffer size of the same value were used for TCP and UDP, respectively. One PC, with IP 192.168.0.2 was the Iperf server and the other, with IP 192.168.0.6, was the Iperf client. Jitter, which represents the smooth mean of differences between consecutive transit times, was continuously computed by the server, as specified by RTP in RFC 1889 [14]. This scheme was also used for FTP measurements, where FTP server and client applications were installed in the PCs with IPs 192.168.0.2 and 192.168.0.6, respectively.

Batch command files were written to enable the TCP, UDP and FTP tests. The results were obtained in batch mode and written as data files to the client PC disk.

3. Results and Discussion

The access points were configured, for each standard IEEE 802.11 b, g, with typical fixed transfer rates. For every fixed transfer rate, data were obtained for comparison of the laboratory performance of the links, measured namely at OSI levels 4 and 7 using the setup of Fig. 1. At OSI level 1, SNR values and noise levels N were recorded, which are shown in Fig. 2. For each standard and every nominal fixed transfer rate, an average TCP throughput was determined. This value was used as the bandwidth parameter for every corresponding UDP test, giving average jitter and average percentage datagram loss. The main results, which did not significantly vary versus time of the day, are shown in Figs. 2-3. In Fig. 2, polynomial fits were made to the TCP throughput data. It is seen that the best TCP throughputs are for 802.11g. The average values are 13.9 and 2.9 Mbps for 802.11g and 802.11b, respectively. In Figs. 2 and 3, the data points representing jitter and percentage datagram loss were joined by smoothed lines. In Fig. 2, the jitter data show some fluctuations, being on average higher for IEEE 802.11b (2.1 ms) than for 802.11g (1.2 ms). Fig. 3 shows that, generally, the percentage datagram loss data (1.4 % on average) agree reasonably well for all standards.

At OSI level 7 we measured FTP transfer rates versus nominal transfer rates configured in the access points for the IEEE 802.11b, g standards. Every measurement was the average for a

single FTP transfer, using a binary file size of 100 Mbytes. The results thus obtained are represented in Fig. 3. Polynomial fits to data were made for the implementation of each standard. It was found that the best performance was for 802.11g.

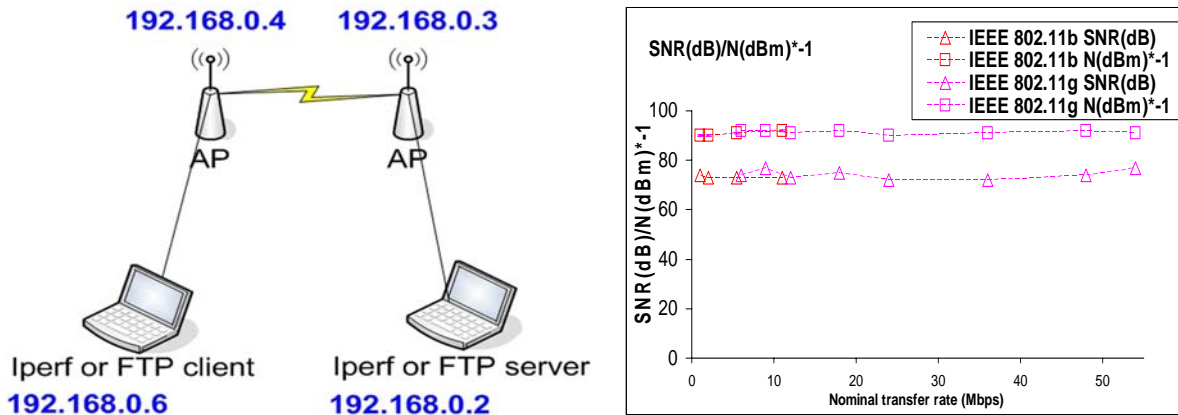


Fig. 1. Wi-Fi laboratory setup scheme and typical SNR (dB) and N (dBm).

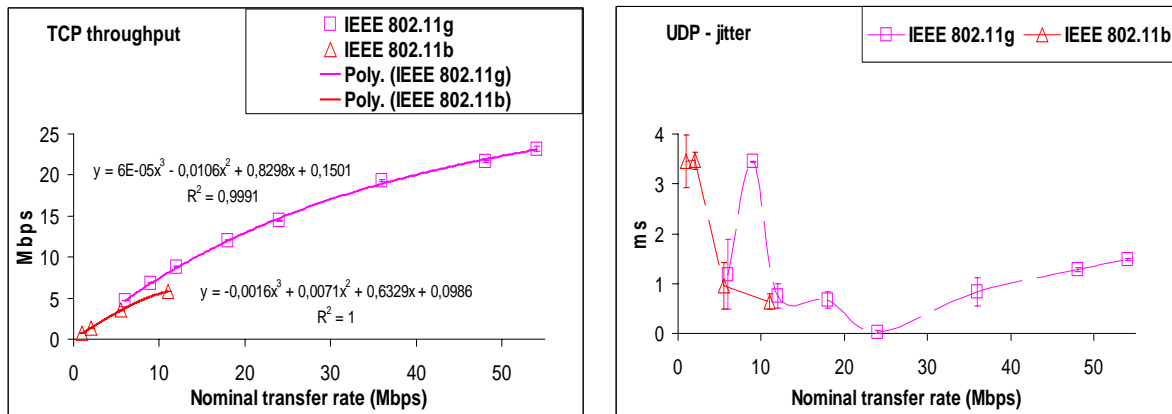


Fig. 2. TCP throughput and UDP jitter results, versus technology (IEEE 802.11 b,g).

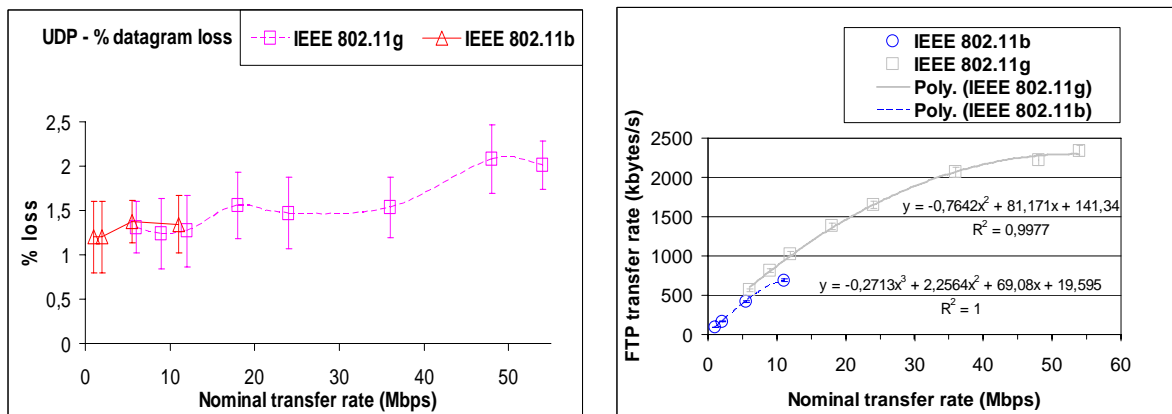


Fig. 3. Results of UDP percentage datagram loss and FTP transfer rate, versus technology (IEEE 802.11 b,g).

4. Conclusions

In the present work a simple laboratory setup was planned that permitted systematic performance measurements of available access point equipments (WRT54GL from Linksys)

for Wi-Fi (IEEE 802.11b, g) in point-to-point links. Through OSI level 4, TCP throughput, jitter and percentage datagram loss were measured and compared for each standard. The best TCP throughput and average jitter were found for 802.11g. For the percentage datagram loss, a reasonably good agreement was found for both standards. At OSI level 7, the best FTP performance was for 802.11g. Additional performance measurements either started or are planned using several equipments, not only in laboratory but also in outdoor environments involving, mainly, medium range links.

Acknowledgements

Supports from Universidade da Beira Interior and FCT (Fundação para a Ciência e a Tecnologia)/POCI2010 (Programa Operacional Ciência e Inovação) are acknowledged.

References

- [1] Web site <http://standards.ieee.org>
- [2] Mark JW, Zhuang W. *Wireless Communications and Networking*. Prentice-Hall, Inc., Upper Saddle River, NJ, 2003.
- [3] Rappaport TS. *Wireless Communications Principles and Practice*, 2nd ed., Prentice-Hall, Inc., Upper Saddle River, NJ, 2002.
- [4] Bruce III WR, Gilster R. *Wireless LANs End to End*, Hungry Minds, Inc., NY, 2002.
- [5] Schwartz M. *Mobile Wireless Communications*, Cambridge University Press, 2005.
- [6] Sarkar N, Sowerby K. High Performance Measurements in the Crowded Office Environment: a Case Study, In Proc. ICCT'06-International Conference on Communication Technology, Guilin, China, 27-30 November 2006, 1-4.
- [7] Monteiro E, Boavida F. *Engineering of Informatics Networks*, 4th ed., FCA-Editor of Informatics Ld., Lisbon, 2000.
- [8] Pacheco de Carvalho JAR, Gomes P, Veiga H, Reis AD. Development of a University Networking Project, in *Encyclopedia of Networked and Virtual Organizations*, Putnik GD, Cunha MM, Editors. IGI Global, Hershey, PA (Pennsylvania), 2008, 409-422.
- [9] Pacheco de Carvalho JAR, Veiga H, Costa R, Gomes P, Reis AD. A Contribution to Experimental Performance Evaluation of Point-to-Point WiMAX Links. In Proc. ISSPIT 2008-8th IEEE International Symposium on Signal Processing and Information Technology, Sarajevo, Bosnia and Herzegovina, December 16-19, 2008, 150-153.
- [10] Pacheco de Carvalho JAR, Veiga H, Gomes PAJ, Ribeiro Pacheco CFFP, Reis AD. Experimental Performance Study of a Very High Speed Free Space Optics Link at the University of Beira Interior Campus: a Case Study. In Proc. ISSPIT 2008-8th IEEE International Symposium on Signal Processing and Information Technology, Sarajevo, Bosnia and Herzegovina, December 16-19, 2008, 154-157.
- [11] Web site <http://www.linksys.com>
- [12] Web site <http://www.dd-wrt.com>
- [13] Web site <http://www.alliedtelesis.com>
- [14] Network Working Group, "RFC 1889-RTP: A Transport Protocol for Real Time Applications", <http://www.rfc-archive.org>